


PlastiKote Zinc Primer 400 ml

Ord.-no.: 010599

Technical Information

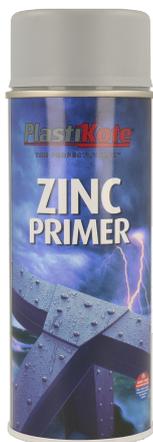

PlastiKote Zinc Primer is a high-quality zinc spray paint primer, for priming metal surfaces to resist corrosion. Perfect for priming any metal that will be at risk of corrosion, the high zinc content in our Zinc Primer spray fuses to the metal surface, protecting and sealing the surface through a unique electro-galvanic process. Suitable for use on galvanised and untreated steel. Ideal for protecting welded seams, and for coating metals like steel to keep corrosion at bay before applying a top coat of paint. Prime your projects to perfection with PlastiKote Zinc Primer's even spread and coverage. It's easier than ever to prime metal DIY projects, welding work, car detailing and more.

Quality & properties

- Ideal for the protection of welded seams
- Resistant to highest demands against corrosion
- Ideal for all metals in outside places, which are liable to rust
- Weather-resistant, light-proof, UV-resistant
- Quick-drying

Physical & chemical data

- Base: Special resin
- Colourname: Zinc Primer
- Degree of gloss: semi mat, 25 ±5 GU
- Efficiency: 400 ML – 1,5 m²
- Dust dry: 10-20 min
- Dry to touch: 30 - 40 min
- Completely dry: 24 h
- Overcoatable: 24 h
- Surfaces: blank zink-coated steel
- Minimum Working Temperature: 10 °C
- Maximum Working Temperature: 25 °C
- Vapour pressure: 4000/20 bar
- Content: 400 ML

How to use

- Before use, carefully read the directions on the packaging and act accordingly.
- The surface should be clean, dry and free of grease. Remove loose old lacquer and rust and sand the surface.
- The surface should be clean, dry and free of grease. The aerosol should have room temperature. Best processing temperature 10 to 25°C. Before use, shake the aerosol for 2 minutes and spray a sample. Distance to the surface to be treated approximately 25 to 30 centimeter.
- Apply the spray paint in several thin layers. Before applying the next layer, again shake the aerosol. When desired, after drying a primer and a lacquer can be applied.
- After use, clean the valve (turn aerosol upside down and press the nozzle for approximately 5 seconds).

Environmentally sound

European Aerosols is committed to apply formulations without restricted or critical ingredients and to achieve best possible performance. The caps and packagings are made of recyclable material.

Disposal

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labeling

All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

As of May 30, 2024 – This release replaces all eventually earlier issued versions.